




STEEL WELDED BOLLARDS TYPE-A

ISO 13795

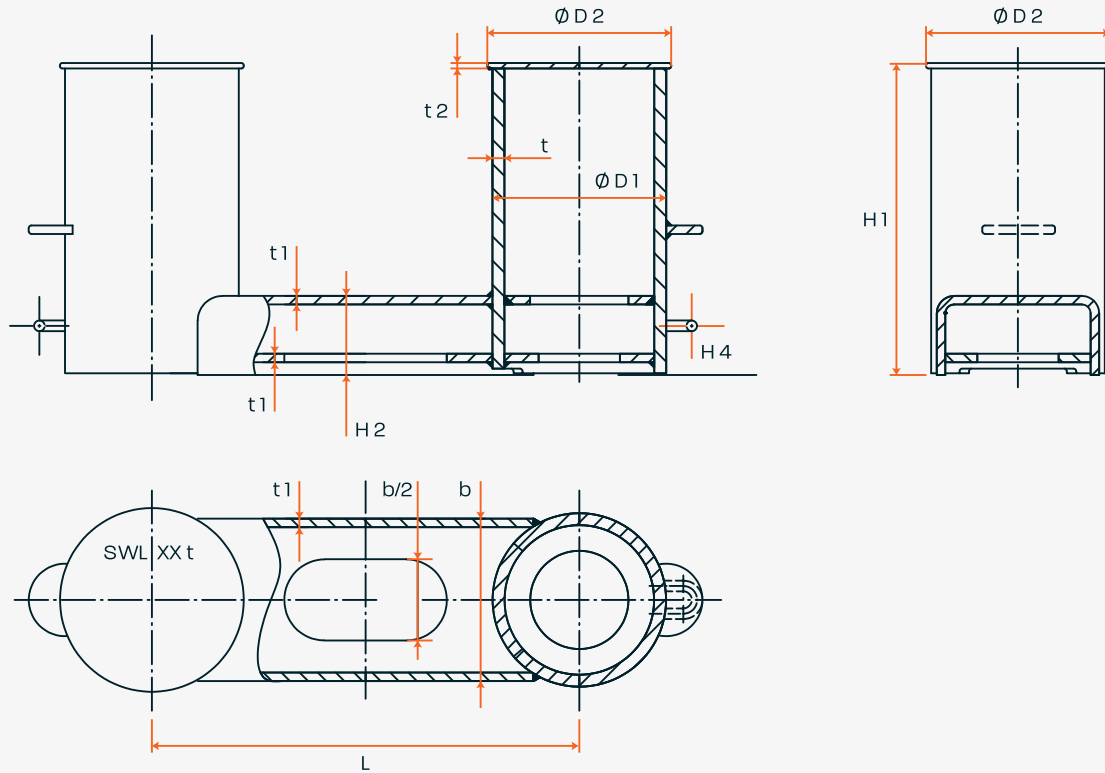

DIMENSIONAL TABLE (mm)

DIMENSIONAL TABLE (mm)															SWL					
															For mooring purpose				For towing purpose	
															One-rope use		Two-rope use			
Nom. Size	D1	D2	D3	D4	H1	H2	H3	H4	E	L	b	t	t1	t2	kN	ton	kN	ton		
250A	267,4	290	-	160	505	135	90	75	-	630	250	12	9	8	156	16	134	14	265	27
250B	267,4	290	-	160	505	135	90	75	-	630	250	10	8	7	127	13	108	11	216	22
300A	318,5	340	150	185	600	150	110	85	300	800	290	21,5	16	9	332	34	306	31	608	62
300B	318,5	340	150	185	600	150	110	85	300	800	290	12	9	9	186	19	161	16	353	36
350A	355,6	380	170	200	685	175	130	105	350	890	340	26	19	11	443	45	418	43	834	85
350B	355,6	380	170	220	685	175	130	105	350	890	340	14	10	9	244	25	216	22	491	50
400A	406,4	430	190	230	730	185	145	115	380	1000	380	28	20	13	594	61	521	53	1,040	106
400B	406,4	430	190	250	730	185	145	115	380	1000	380	15	11	11	326	33	269	27	657	67
450A	457,2	480	210	265	770	195	160	120	410	1100	425	29	21	14	753	77	612	62	1 216	124
450B	457,2	480	210	285	770	195	160	120	410	1100	425	14,5	11	11	382	39	292	30	765	78
500A	508	530	235	295	830	230	200	150	460	1250	480	32	23	16	992	101	757	77	1 511	154
500B	508	530	235	320	830	230	200	150	460	1250	480	14,5	11	11	457	47	326	33	912	93
550A	558,8	580	255	330	900	270	200	180	540	1380	520	31	22	16	1 131	115	812	83	1 619	165
550B	558,8	580	255	350	900	270	200	180	540	1380	520	21	16	11	781	80	541	55	1 560	159
600	609,4	630	280	365	950	300	200	200	600	1550	560	33	23	16	1 401	143	948	97	1 893	193