

DESCRIPTION

AC-14 High Holding Power Anchors, weight ranging from 2.475 kgs to 13.350 kgs

A “high holding power” (HHP) anchor is an anchor with a holding power of at least twice that of an ordinary stockless anchor of the same weight. When an anchor is designated as “high holding power,” and its superior holding ability is proven, the mass of the anchor can be reduced by 75% of the mass required for an ordinary stockless bower anchor, such as Spek type.

AC-14 HHP Anchors are very popular as bower anchors on board commercial vessels, and we keep their stock up to the weight of 13350 kg. All products in our stock are certified by DNV and ABS and manufactured according to IACS standards.

TECHNICAL DATA

Weight	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Proof Load	Chain Size
1440 kg	860	1095	310	1605	1795	495	342 kN	34 mm
1575 kg	890	1130	320	1665	1855	515	362 kN	36 mm
1710 kg	915	1160	330	1705	1900	525	391 kN	36 mm
1845 kg	935	1180	335	1740	1940	540	409 kN	38 mm
1980 kg	950	1205	340	1775	1975	550	438 kN	40 mm
2140 kg	970	1225	350	1810	2015	560	456 kN	42 mm
2295 kg	1005	1270	360	1875	2090	590	459 kN	44 mm
2475 kg	1035	1310	375	1930	2150	600	505 kN	46 mm
2655 kg	1060	1365	385	1975	2205	610	531 kN	46 mm
2835 kg	1085	1375	390	2022	2255	625	553 kN	48 mm
3040 kg	1105	1405	400	2070	2300	640	581 kN	50 mm
3240 kg	1130	1435	407	2110	2350	650	605 kN	50 mm
3445 kg	1155	1465	415	2155	2405	670	629 kN	52 mm
3670 kg	1180	1495	425	2200	2455	680	652 kN	54 mm
3940 kg	1205	1530	435	2250	2510	695	680 kN	56 mm
4210 kg	1235	1565	445	2305	2565	710	706 kN	58 mm
4500 kg	1265	1600	455	2360	2625	730	734 kN	60 mm
4840 kg	1295	1640	465	2415	2690	745	763 kN	62 mm
5175 kg	1320	1675	476	2470	2750	762	793 kN	64 mm
5515 kg	1350	1710	485	2520	2810	778	827 kN	66 mm
5850 kg	1376	1745	496	2570	2865	795	859 kN	68 mm
6225 kg	1405	1780	506	2625	2925	810	898 kN	70 mm
6525 kg	1430	1810	514	2665	2970	823	927 kN	73 mm
6975 kg	1465	1855	527	2730	3045	845	966 kN	76 mm
7425 kg	1490	1890	537	2782	3100	860	1003 kN	78 mm
7875 kg	1520	1925	547	2840	3165	875	1038 kN	78 mm
8325 kg	1550	1960	560	2890	3220	895	1073 kN	81 mm
8775 kg	1570	1995	568	2940	3280	910	1097 kN	84 mm
9225 kg	1600	2030	578	2990	3333	925	1121 kN	87 mm
9675 kg	1630	2060	585	3040	3385	940	1152 kN	87 mm
10125 kg	1655	2095	595	3085	3440	955	1179 kN	90 mm
10575 kg	1680	2125	605	3130	3490	970	1213 kN	92 mm
11025 kg	1700	2155	613	3175	3540	980	1240 kN	95 mm
11550 kg	1725	2190	625	3225	3595	995	1267 kN	97 mm



IZMIR HEADQUARTER

+90 232 616 17 19
sales@adamarine.com

ISTANBUL OFFICE

+90 216 446 07 30
sales@adamarine.com

Weight	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Proof Load	Chain Size
12075 kg	1755	2220	630	3275	3646	1010	1304 kN	97 mm
12675 kg	1780	2255	640	3325	3705	1025	1351 kN	100 mm
13350 kg	1810	2295	655	3385	3370	1040	1400 kN	102 mm





IZMIR **HEADQUARTER**

+90 232 616 17 19
sales@adamarine.com

ISTANBUL **OFFICE**

+90 216 446 07 30
sales@adamarine.com

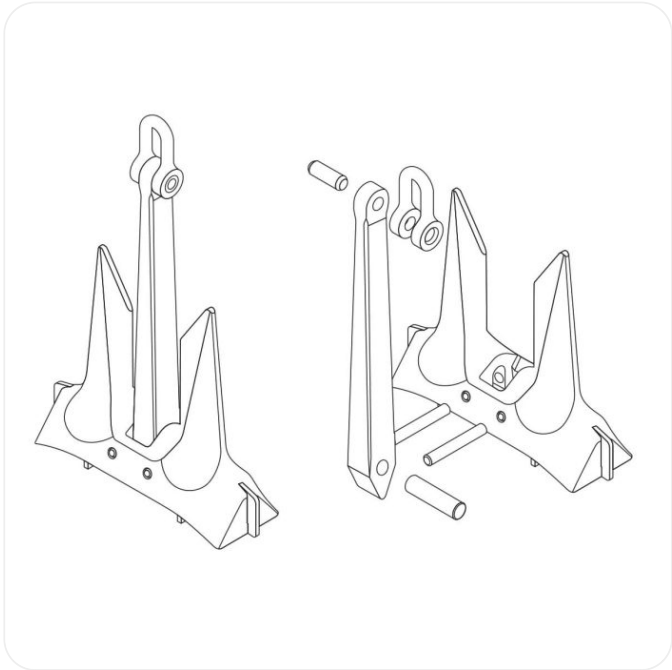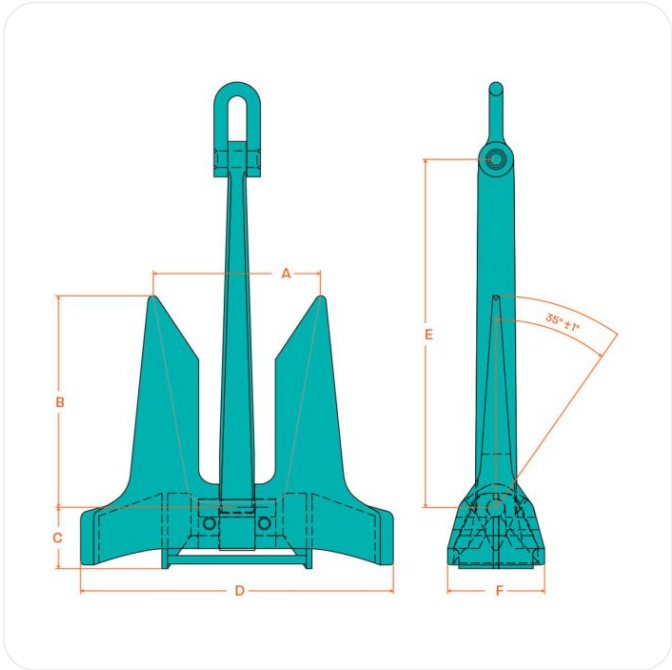

IZMIR **HEADQUARTER**

+90 232 616 17 19
sales@adamarine.com

ISTANBUL **OFFICE**

+90 216 446 07 30
sales@adamarine.com